

# Demo Questions

## Cisco 350-601 Exam

### Implementing Cisco Data Center Core Technologies (DCCOR)

Thank you for downloading 350-601 Exam PDF

#### Question #1 *Topic 1*

DRAG DROP -

An engineer is implementing NetFlow on a Cisco Nexus 7000 Series Switch.

Drag and drop the NetFlow commands from the left into the correct order they must be entered on the right.

Select and Place:

```
N7K-1(config)# interface <interface>  
N7K-1(config-if)# ip flow monitor NetflowMonitor input
```

```
N7K-1(config)# feature netflow
```

```
N7K-1(config)# flow exporter NetflowMonitor  
N7K-1(config)# flow record NetflowMonitor
```

```
N7K-1(config)# flow monitor NetflowMonitor
```

Step 1

Step 2

Step 3

Step 4

**Correct**

**Answer:**

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input	N7K-1(config)# feature netflow
N7K-1(config)# feature netflow	N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	N7K-1(config)# flow monitor NetflowMonitor
N7K-1(config)# flow monitor NetflowMonitor	N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input

Reference:

<https://www.cisco.com/c/en/us/support/docs/switches/nexus-7000-series-switches/112213-netflow-nexus7000-nsox-configex.html>

### Question #2Topic 1


Which virtual MAC address is the default for HSRP version 2 group 10?

- A. 0000.5E00.0110
- B. 0000.0C9F.F00A
- C. 3716.1350.1C0A
- D. 0000.0C9F.F010

**Correct Answer: B**

### Question #3Topic 1

Refer to the exhibit.

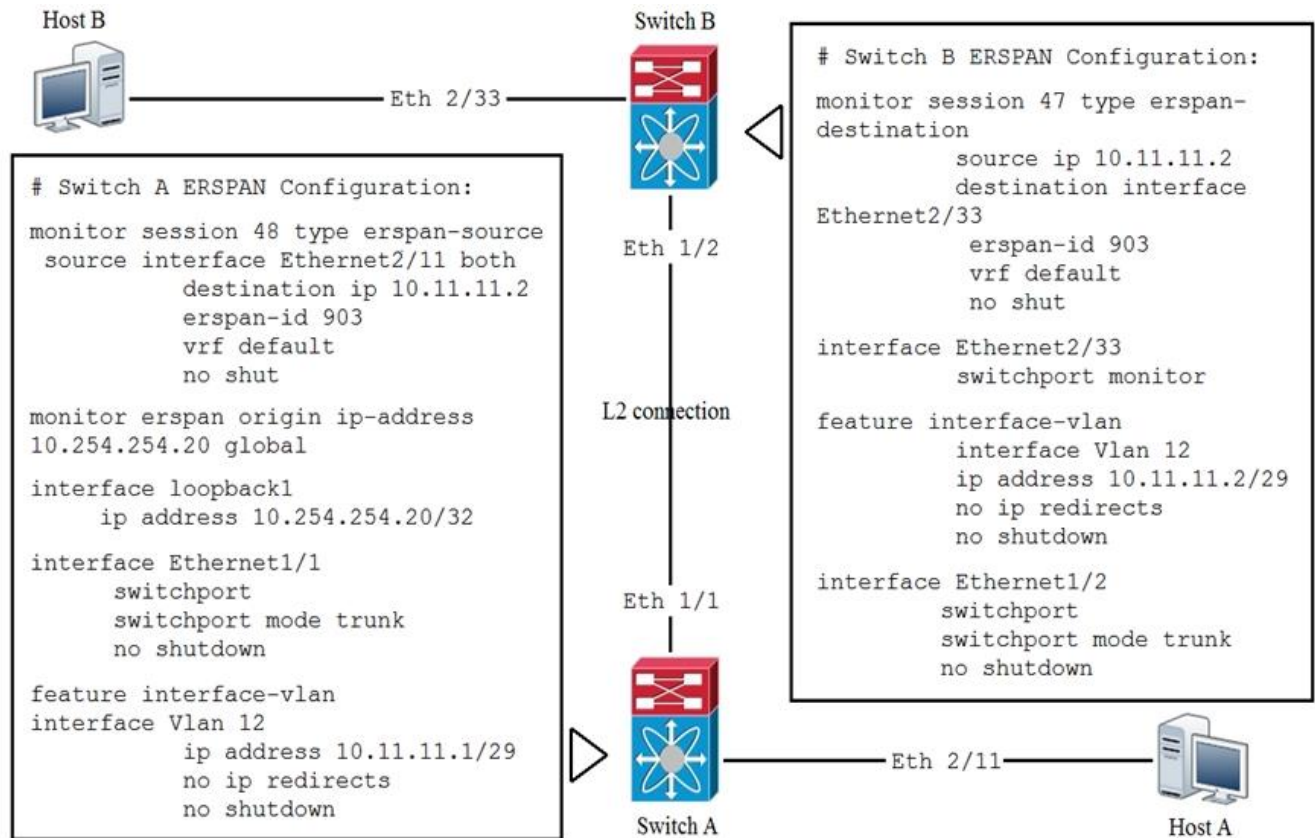

Which statement about the ERSPAN configuration in this environment is true?

- A. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.
- B. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.
- C. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.
- D. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.

**Correct Answer: D**

**Question #4Topic 1**

Refer to the exhibit.

```
ACI-Leaf1# show ip route vrf DATACENTER:DC
10.20.1.0/24, ubest/mbest: 1/0, attached, direct, pervasive
  *via 10.0.8.65%overlay-1, [1/0], 4w3d, static
172.16.100.0/24, ubest/mbest: 1/0
  *via 10.1.168.95%overlay-1, [200/5], 3wod, bgp-132, internal, tag 132 (mpls-vpn)
172.16.99.0/24, ubest/mbest: 1/0
  *via 10.0.1.14, [20/0], 3wod, bgp-132, external, tag 200
```

Which two statements about the routing table of the leaf switch are true? (Choose two.)

- A. 10.20.1.0/24 is a BD subnet in ACI.
- B. The next hop 10.0.1.14 for route 172.16.99.0/24 is the TEP address of a border leaf in ACI.
- C. 172.16.100.0/24 is a BD subnet in ACI.
- D. The next hop 10.1.168.95 for route 172.16.100.0/24 is the TEP address of a border leaf in ACI.
- E. The next hop 10.0.8.65 for route 10.20.1.0/24 is the TEP address of a border leaf in ACI.

**Correct Answer:** *AE*

### Question #5Topic 1

Which mroute state is created when Bidirectional PIM is deployed at a site?

- A. \*.G
- B. MVPN Type-6
- C. MVPN Type-7
- D. S.G

**Correct Answer:** *A*